




WINEC50 SX / SRX CONVENIENT AND EFFICIENT

- Keeps cellars at a constant temperature of between 8 and 18 °C*
- Humidity control: excess humidity is condensed and evacuated towards the outside
- Rubber shock absorbers are incorporated, creating an anti-vibration system
- Dimensions that make the product able to adapt to different rooms (store room, attic...)
- Controlled power consumption thanks to the reaction turbine on the condenser side
- Reheating feature for the Wine C50 SX et Wine C50 SRX models
- The Wine C50 SRX model is equipped with a heating belt that provides protection in the event of difficult weather conditions (such as winter)
- Easy to install, provided with a wooden frame
- Easy upkeep: just a filter that needs to be changed once a year
- 2 year warranty



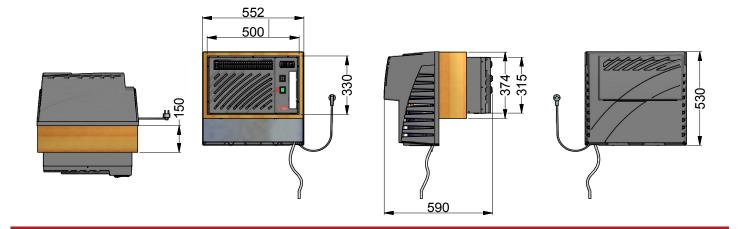

THE ADVANTAGES OF WINE C50 SX/SRX

- Complete standard equipment with which to control and maintain the temperature stability of the cellar
- Wines are protected from excessive light thanks to an integrated night light
- Easy to install with its embeddable wood casing
- Specially designed for very cold areas, the C50 SRX should be embedded into an outside wall

sulated wall
Cellar neMaster
sulated wall ——————————————————————————————————
Cellar WineMaster

REFERENCE	WINE C50 SX	WINE C50 SRX
Electrical supply	230-240 V - 50Hz	230-240 V - 50Hz
Air conditioning capacity*	Up to 50 m ³	Up to 50 m³
Overall dimensions	H.530 x W.552 x D.590 mm	H.530 x W.552 x D.590 mm
Weight	43 Kg	43 Kg
Cooling capacity**	1200 W at 15°C	1200 W at 15°C
Electrical power absorbed	550 W	550 W
Sound level (at 1 m and 3 m)	51 dB / 47 dB	51 dB / 47 dB
Cellar airflow rate (cold side)	400 to 500 m³/h	400 to 500 m³/h
Outside airflow rate (hot side)	350 to 550 m³/h	350 to 550 m³/h
Coolant	R1234 yf	R1234 yf
Heat resistance	500 W	500 W
Temperature regulation*	Preset to 12 °C adjustable between 8 and 18 °C*	Preset to 12 °C adjustable between 8 and 18 °C*
Maximum outside temperature**	35°C	35°C
Heating belt	NO	YES

- * With right insulation and adapted to the volume of the cellar.
- ** The power could be reduced in function of outside temperature, its why the device may lose capacity to keep the cellar at 12 °C if the outside temperature gets close to 35 °C.

WINEMASTER CONNECT,

Just one box and your wine cellar is connected!



Optimal wine conservation



Remote supervision



Statistics in real time



Failure alerts

Thanks to WineMaster Connect,
you can remotely adjust and ensure
the correct operation
of your air conditioner.
Simply plug our
connected box into your
air conditioner to monitor
or change the main operating
parameters in real time.

This device works with a subscription. Ask your retailer for details of pricing.

A STORY OF LOVE AND TERROIR...

It is in the foothills of the Alsatian wineyards, where the wine route starts, that the WineMaster® story begins. Our attachment to terroir and our love of wine have always been the source of our thought process and creativity.

Ever since its inception in 1984, the skills and know-how of the men and women of WineMaster® have been at the heart of every step in the air conditioner making process.

Quality and detail are what motivate us, and we are proud of our products and their 100 % Alsatian design.

INNOVATION AND EXCELLENCE ARE WINEMASTER'S KEY VALUES.



WWWIGOMEDIA Text and photo are not contractual - WDEPWINEC50AN 2024 - V3